

# DOUBLE CHECK VALVE DC



## TECHNICAL DATA

Nominal diameter: 2 in – 12 in  
 Face-to-face: DIN 3202-K3/ISO 5752 long  
 Flange accommodation: DIN 2632/33 PN 10/16  
 ANSI B 16.5, Class 150  
 Flange Surface Design: DIN 2526, Form A-E, ANSI RF  
 Marking: DIN EN 19  
 Tightness check: DIN 3230 T3, BN (Leakage Rate 1)  
 ISO 5208, Category 3  
 API 598 Table 5  
 ANSI B 16-104, Class VI  
 Use standard: EN 593 (DIN 3354)  
 Temperature range: 32 °F / 266 °F (depending on pressure,  
 medium and temperature)


Standard construction:

	DC 1	DC 2
Body:	GG-25	GG-25
Disc:	Bronze	Stainless Steel
Shafts:	Stainless Steel	Stainless Steel
Springs:	Stainless Steel	Stainless Steel
Seal:	NBR	EPDM
Bearing:	PTFE	PTFE
Operating pressure:	230 psi	230 psi

## FEATURES

- Maintenance-free wafer pattern double check valve
- Can be disassembled, material-specific recycling possible.

## PRESSURE LOSS DIAGRAM

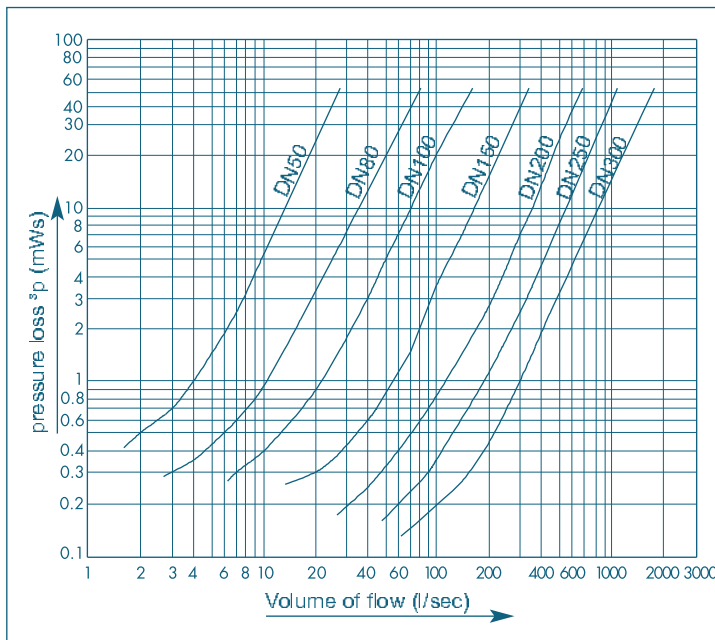

The values given in the diagram are valid for water at 20 °C. They result of measurements at valves which are mounted in an horizontal conduction. For the ascertainment of pressure losses for other media, the water flow amount has to be calculated with the following formular:


$$W_{ap} = \sqrt{\frac{\gamma_a}{1000}} \times Q_a$$

$W_{ap}$  = equivalent water flow in m<sup>3</sup>/h

$\gamma_a$  = flow amount of the media in its operating condition in m<sup>3</sup>/h

$Q_a$  = Volume of flow in operating condition (m<sup>3</sup>/h)

# DOUBLE CHECK VALVE DC

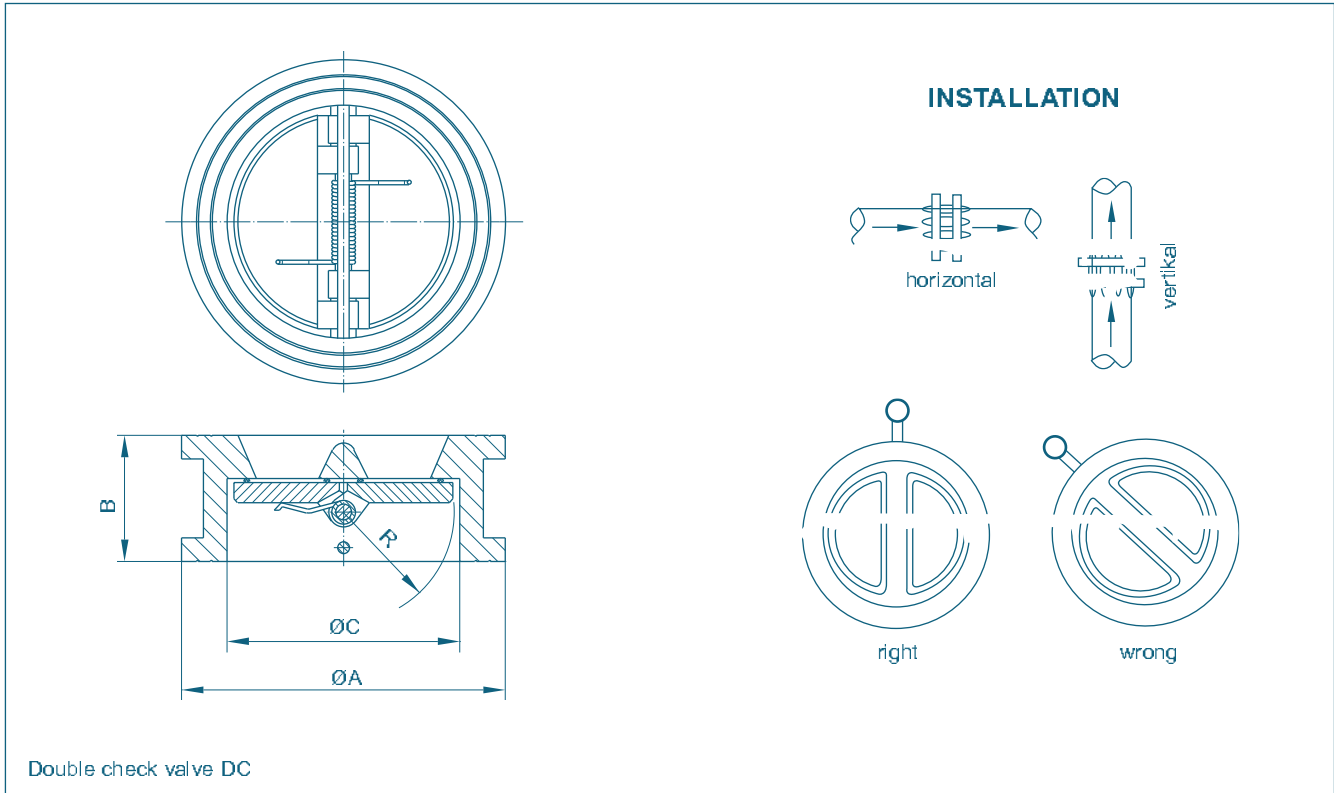

DN [mm]	Size [in]	Dimensions [in]				min. Opening pressure [psi]	C <sub>v</sub> [m <sup>3</sup> /h]	Weight [lb]
		A	B	C	R			
50	2	4.29	1.69	2.84	1.22	0.61	52	3
65	2½	5.67	1.81	3.55	1.38	0.61	81	5
80	3	5.67	2.52	3.55	1.65	0.55	140	7
100	4	7.64	2.52	5.59	2.21	0.44	280	9
125	5	7.64	2.76	5.59	2.60	0.36	408	15
150	6	10.84	2.99	8.75	3.11	0.36	758	21
200	8	10.84	3.51	8.75	4.02	0.30	1517	55
250	10	14.97	4.49	12.92	5.04	0.26	2450	66
300	12	14.97	4.49	12.92	6.11	0.23	4084	80

Subject to change without notice.

Installing the check valve on top of a pump please ensure that neither the valve is mounted directly on the pump flange or the following bend or a smoothing section of less than 5 x DN is observed.

For tight sealing of the DC a back pressure of not less than 15 psi is required.